
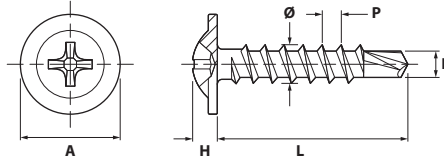


## TORNILLO FSTZ AUTOPERFORANTE CABEZA ABOMBADA CINCADO

SELF DRILLING SCREW PAN HEAD ZINC PLATED  
 VIS AUTOPERCEUSE TÊTE BOMBÉE EN ACIER ZINGUÉ  
 FLACHKOPF-BOHRSCHRAUBE KREUZSCHLITZ VERZINKT




CAJA / BOX / BOÎTE

CINCADO / ZINC PLATED

CÓDIGO	MEDIDA	LLAVE	CAPACIDAD TALADRO	GROSOR A FIJAR	VELOCIDAD TALADRO	A	H	D	E	P	
Code / Code	Measure / Mesure	Wrench / Clé	Drill capacity	Thickness to fix	Drilling speed	min. - max.	min. - max.	min. - max.	min. - max.	Nm	
	ØxL		Capacité de forage	Épaisseur	Vitesse de perçade	m.m.	m.m.	m.m.	m.m.		
	m.m.	PH	m.m.	m.m.	rpm						
FSTZ4213	4,2x13	2	0,75 - 2,5	4	2.250	10,8 - 11,20	1,90 - 2,50	4,09 - 4,22	3,35 - 3,60	~1,40	500
FSTZ4216	4,2x16	2	0,75 - 2,5	7	2.250	10,8 - 11,20	1,90 - 2,50	4,09 - 4,22	3,35 - 3,60	~1,40	500
FSTZ4219	4,2x19	2	0,75 - 2,5	10	2.250	10,8 - 11,20	1,90 - 2,50	4,09 - 4,22	3,35 - 3,60	~1,40	500
FSTZ4225	4,2x25	2	0,75 - 2,5	16	2.250	10,8 - 11,20	1,90 - 2,50	4,09 - 4,22	3,35 - 3,60	~1,40	500

## TORNILLO AUTOPERFORANTE CABEZA EXTRAPLANA CINCADO

SELF DRILLING SCREW FLAT PAN HEAD ZINC PLATED  
 VIS AUTOPERCEUSE TÊTE BOMBÉE PLATE EN ACIER ZINGUÉ  
 FLACHKOPF-BOHRSCHRAUBE KREUZSCHLITZ VERZINKT

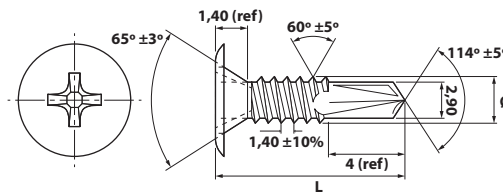


CAJA / BOX / BOÎTE

CINCADO / ZINC PLATED

CÓDIGO	MEDIDA	LLAVE	CAPACIDAD TALADRO	GROSOR A FIJAR	PAR DE APRIETE	EXTRACCIÓN	VELOCIDAD TALADRO	
Code / Code	Measure / Mesure	Wrench / Clé	Drill capacity	Thickness to fix	Torque	Tension load	Drilling speed	
	ØxL		Capacité de forage	Épaisseur	Couple de serrage	Extraction	Vitesse de perçade	
	m.m.	PH	m.m.	m.m.	Nm	kN	rpm	
FSTP4214	4,2x14	2	2	6	4,7	6	2.000	500
FSTP4223	4,2x23	2	2	15	4,7	6	2.000	500

## TORNILLO AUTOPERFORANTE CABEZA EXTRAPLANA CINCADO NEGRO

SELF DRILLING SCREW FLAT PAN HEAD BLACK ZINC PLATED  
 VIS AUTOPERCEUSE TÊTE BOMBÉE PLATE EN ACIER ZINGUÉ NOIR  
 FLACHKOPF-BOHRSCHRAUBE KREUZSCHLITZ SCHWARZ VERZINKT

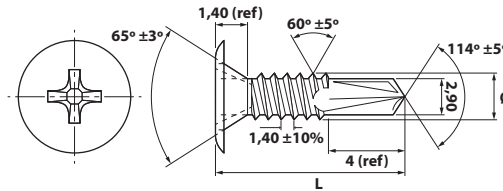



CAJA / BOX / BOÎTE

CINCADO NEGRO / BLACK ZP.

CÓDIGO	MEDIDA	LLAVE	CAPACIDAD TALADRO	GROSOR A FIJAR	PAR DE APRIETE	EXTRACCIÓN	VELOCIDAD TALADRO	
Code / Code	Measure / Mesure	Wrench / Clé	Drill capacity	Thickness to fix	Torque	Tension load	Drilling speed	
	ØxL		Capacité de forage	Épaisseur	Couple de serrage	Extraction	Vitesse de perçade	
	m.m.	PH	m.m.	m.m.	Nm	kN	rpm	
FSTPN4214	4,2x14	2	2	6	4,7	6	2.000	500
FSTPN4223	4,2x23	2	2	15	4,7	6	2.000	500

## TORNILLO AUTOPERFORANTE CABEZA EXTRAPLANA LACADO BLANCO

SELF DRILLING SCREW FLAT PAN HEAD WHITE LACQUERED  
 VIS AUTOPERCEUSE TÊTE BOMBÉE PLATE EN ACIER LAQUÉ BLANC  
 FLACHKOPF-BOHRSCHRAUBE KREUZSCHLITZ SCHWARZ WEISS GESTRICHENEN

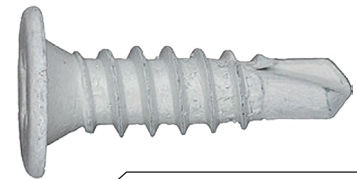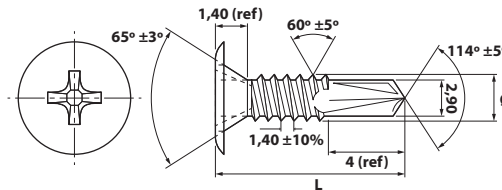

CAJA / BOX / BOÎTE

LACADO BLANCO / WHITE LAC.

CÓDIGO	MEDIDA	LLAVE	CAPACIDAD TALADRO	GROSOR A FIJAR	PAR DE APRIETE	EXTRACCIÓN	VELOCIDAD TALADRO	
Code / Code	Measure / Mesure	Wrench / Clé	Drill capacity	Thickness to fix	Torque	Tension load	Drilling speed	
	ØxL		Capacité de forage	Épaisseur	Couple de serrage	Extraction	Vitesse de perçade	
	m.m.	PH	m.m.	m.m.	Nm	kN	rpm	
FSTPLB4214	4,2x14	2	2	6	4,7	6	2.000	500
FSTPLB4223	4,2x23	2	2	15	4,7	6	2.000	500